


CUSTOMER COPY

RoHS

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	Jerry Oct,05,05'		

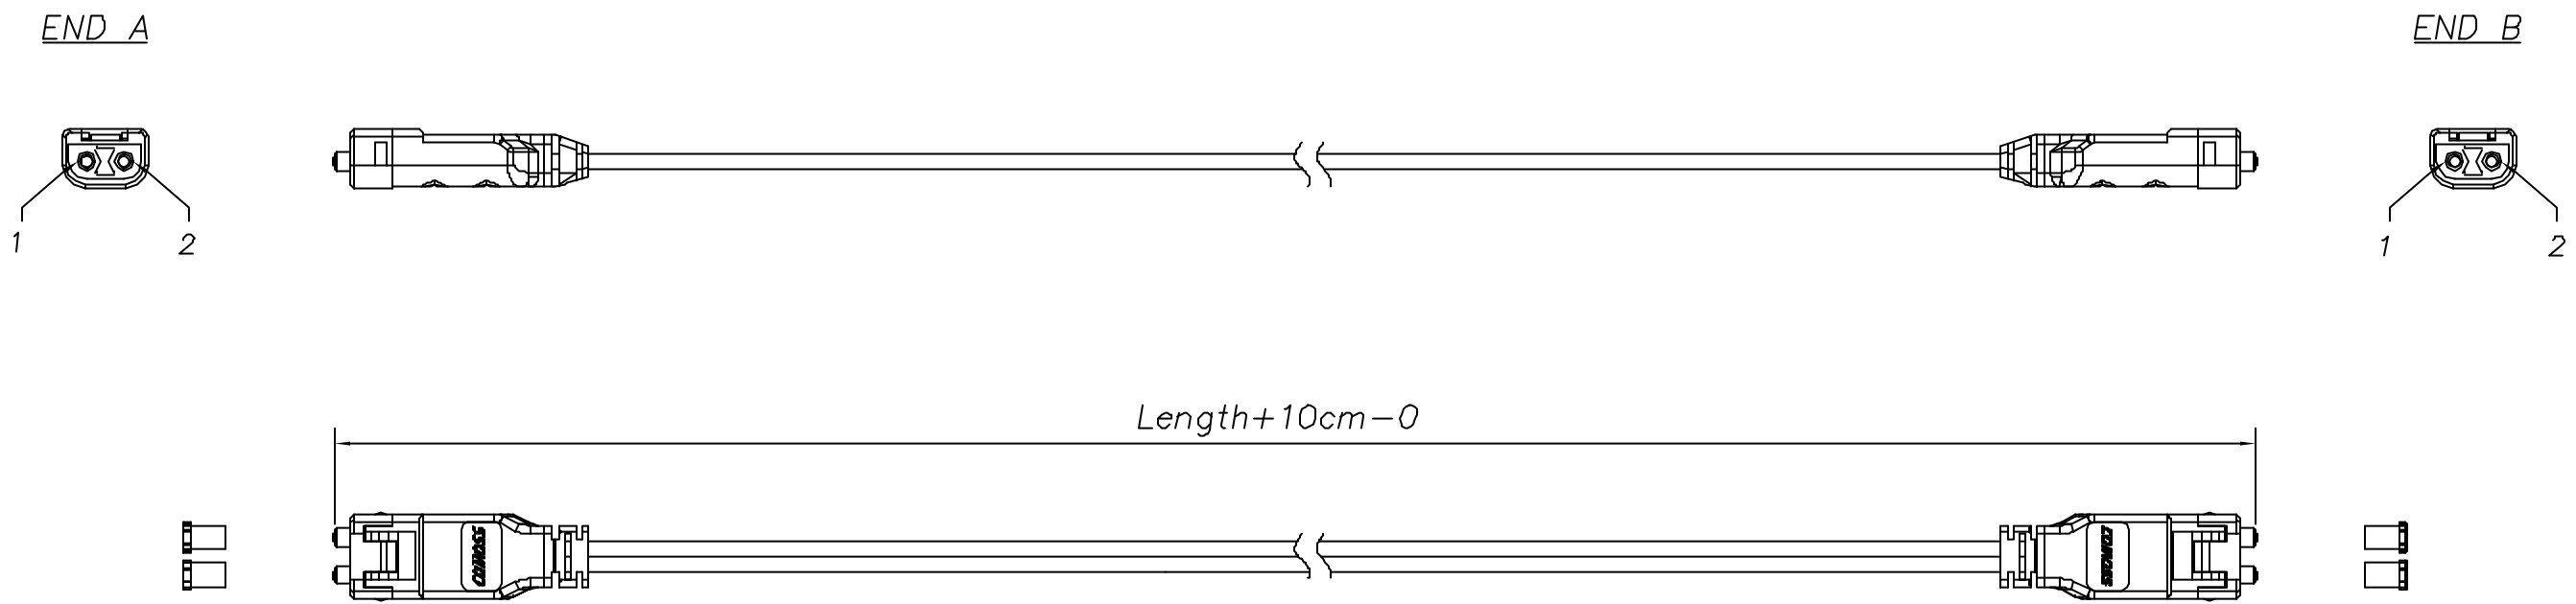



Notes:

- 1) Total Loss: 3.0 dB+0.2 dB/m
- 2) Material: Plug Housing : RoHS, Thermoplastic G.F., UL94-V0
 Inner Housing : RoHS, Thermoplastic G.F., UL94-V0
 Strain Relief : RoHS, PVC
 Dust Cover : RoHS, PE
 Hold Mechanism : RoHS, Stainless Steel
- 3) Colour(Housing) : See order information (N/A)
- 4) Components : Plug Housing, Inner Housing, Hold Mechanism, Strain Relief, Dust Cover
- 5) Patch Cord Length : Different cable length is available for discussion
- 6) Product must conform to RoHS

Fiber Path

End A	End B
1	2
2	1

Cable Structure: 980/1000 NA:0.5 (Not to Scale)

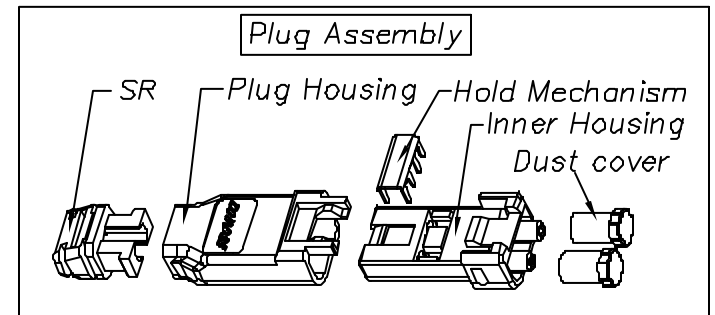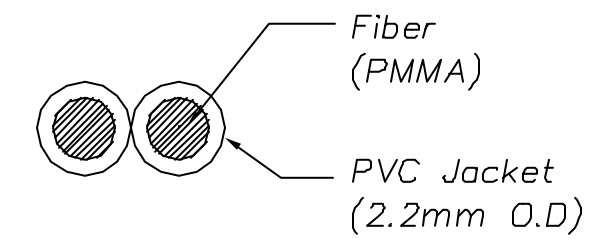

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.
.X ±0.25 .XX ±0.20 .XXX ±0.10	.X° ±1.0° .XX° ±0.5° .XXX° ±0.2°	Jerry Oct,05,05'	Keith Apr,26,05'	
SHEET 1/1		CHK	Date	Item
FINISH See Notes		APPR	Date	Plastic Optical Fober SMI to SMI Patch Cord
Scale N/A	Unit: mm			Dwg. No. A02243
				Part No. B0602035
				SIZE A3
				REV 1.0