

# COMOSS


RoHS

COMOSS ELECTRONIC CO., LTD.

DATE :	Sep/05/12'
CMS P/N :	
Dwg NO. :	
CUST. P/N :	1394C-9ARS/O-9AS-500mm
CUSTOMER :	
DESCRIPTION	1394C-9ARS/O-9AS-500mm
APPROVE:	

REV.	DATE	DESCRIPTION	BY
1.0	Sep/05/12'	D2713	Eve


## CONFIGURATION

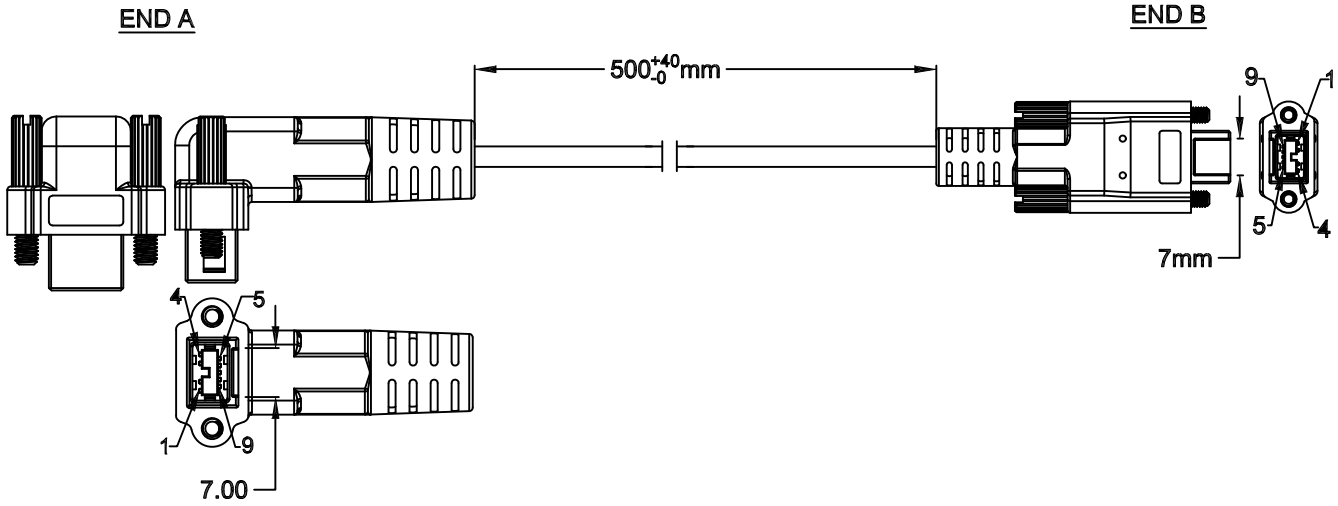

## SPECIFICATION OF MATERIAL

<b>1. END A</b>					
CONT. PLATING	Gold 30u"	MOLD No.	CMS-1394b26	SHIELD'G	-
CONNECTOR TYPE	HSP-AM015500			T. SCREW	Jack Screw M3 x 0.5(SUS303) Size: 4.0x20.0x4.5mm
<b>2. END B</b>					
CONT. PLATING	Gold 30u"	MOLD No.	CMS-1394b25	SHIELD'G	-
CONNECTOR TYPE	HSP-AM013400			T. SCREW	Jack Screw M3 x 0.5(SUS303) Size: 5.0x37.0x7.0mm
<b>3. WIRES</b>					
WIRE GAUGE	23Awg & 28Awg	LENGTH	610+15-0mm	SHIELD'G	TAB
CONDUCTORS	2C+(1TP+TAS)x2	COLOR	Black	UL/CSA	UL20276
JACKET MAT'L	PVC	INS. MAT'L	HD-PE & P.E.	WIRE O.D.	7.5mm

## CONNECTOR PIN OUT

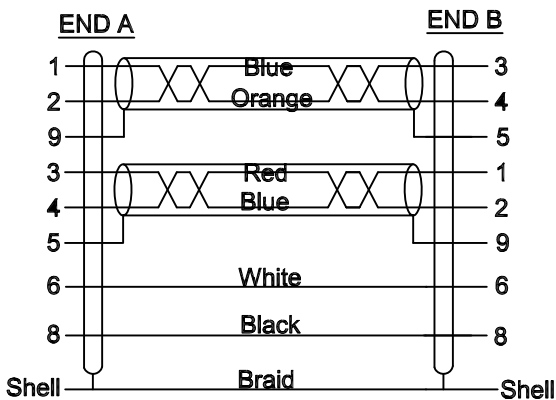

## SPECIAL REQUIREMENTS

- Product requirement for Green environment protection:RoHS.
- Overmold PVC 65P Black (RoHS).
- Cable is high flex
- Pack it in a PE bag after spiralling it as the drawing.

