

COMOSS

RoHS

COMOSS ELECTRONIC CO., LTD.


DATE :	Apr/28/13'
CMS P/N :	B0106438
Dwg NO. :	A07183
CUST. P/N :	MDR26P-MDR26P-0300-00
CUSTOMER :	
DESCRIPTION	MDR26P-MDR26P-0300-00
APPROVE:	

REV.	DATE	DESCRIPTION	BY
1.0	Apr/29/13'	D2819	Eve

CONFIGURATION

END A

END B

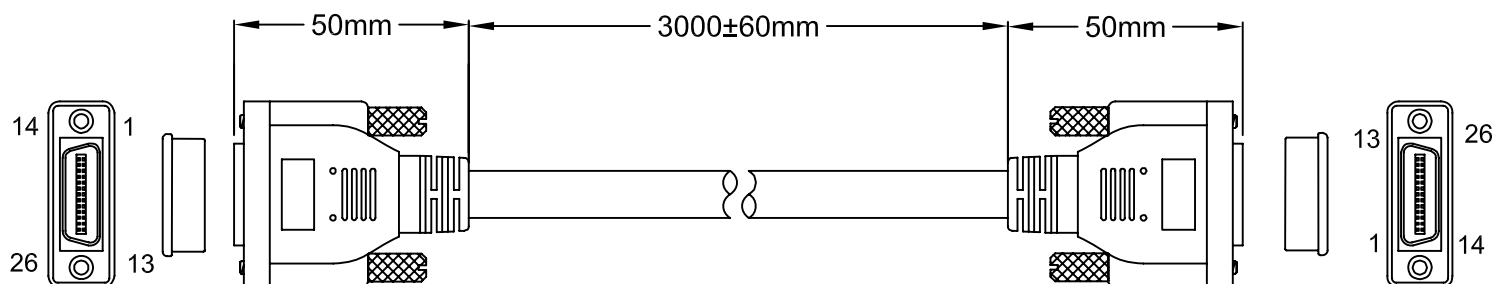

SPECIFICATION OF MATERIAL

1. END A

CONT. PLATING	Gold 15U"	MOLD No.	30.0039	SHIELD'G	Copper Foil
CONNECTOR TYPE	FMC26FL(S)XXX			T. SCREW	Jack Screw #4-40 Size:6.0X39.6mm

2. END B

CONT. PLATING	Gold 15U"	MOLD No.	30.0039	SHIELD'G	Copper Foil
CONNECTOR TYPE	FMC26FL(S)XXX			T. SCREW	Jack Screw #4-40 Size:6.0X39.6mm

3. WIRES

WIRE GAUGE	30Awg	LENGTH	3070+30-0mm	SHIELD'G	AB
CONDUCTORS	11TP	COLOR	Black	UL/CSA	UL20379
JACKET MAT'L	PVC	INS. MAT'L	Foam PE&PP	WIRE O.D.	9.5mm

4. SPECIAL REQUIREMENTS

- 4.1 Product requirement for Green environment protection:RoHS.
- 4.2 Overmold PVC is 60P , Black(RoHS).
- 4.3 Cover Overmold PVC is 60P , Black(RoHS).

*** Standard Product**