


CUSTOMER COPY

RoHS

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	Linda JUL.31.15'	Linda JUL.31.15'	Victor JUL.31.15'

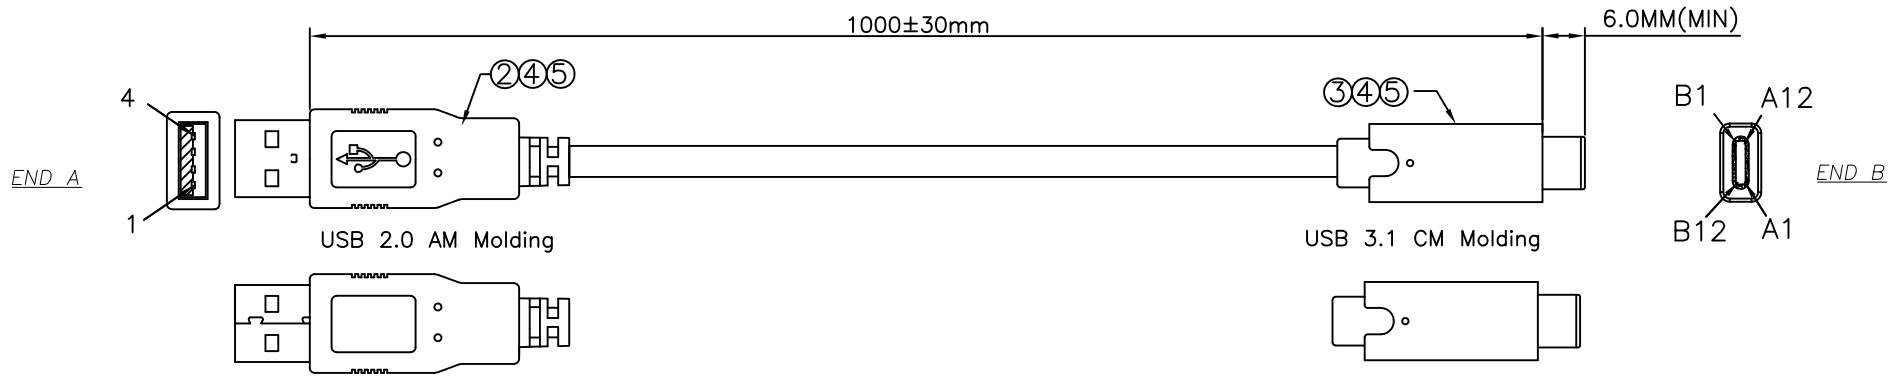

Pin Assignment

END A	END B
4	DRAIN
RED	A1 B1 A12 B12
	R(5.1K) A5
1	WHITE
3	GREEN
2	A4 B4 A9 B9
	A6
	A7
Shell	Drain
	Shell

Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

NOTE:

1. USB 2.0 Cable 28AWG*2P+24AWG*2C OD:4.2±0.2mm Color: Black
- 2.USB2.0 (A) M Solder Type Shell Nickel Black Insulation,
- 3.USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,
- 4.INSIDE MOLDING:PE
- 5.OUTSIDE MOLDING:Black PVC
- 6.CONTACTS:

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.
.x ±0.3 .xx ±0.2 .xxx ±0.1	x ±0.2° .xx ±0.1° .xxx	Linda	JUL.31.15'	
SHEET	FINISH	Design	Date	Item
Scale N/A	Unit: mm	Linda	JUL.31.15'	USB 2.0 A TYTP TO USB 3.1 C TYPE
		CHK	Date	Dwg.No.
		APPR	Date	Part No.
		Victor	JUL.31.15'	SIZE A4 REV 1.0