


CUSTOMER COPY

RoHS

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	Linda JUL.31.15'	Linda JUL.31.15'	Victor JUL.31.15'

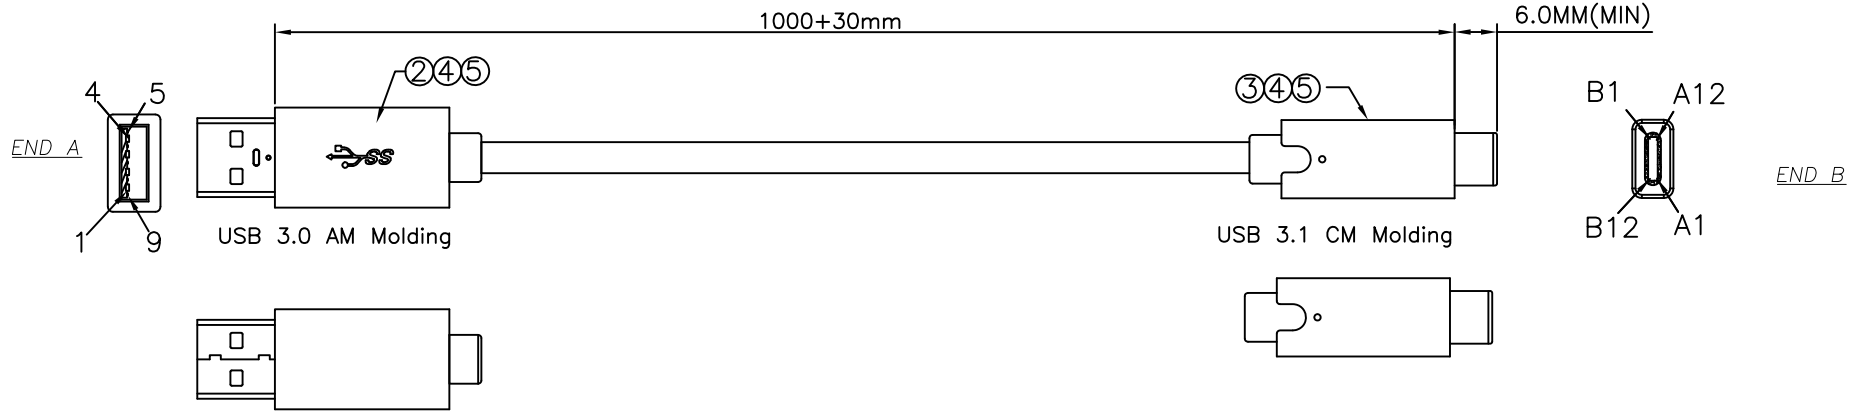

Pin Assignment

END A		END B				
4	DRAIN (SDP1+SDP2)	DRAIN	A1	B1	A12	B12
7			A5			
1	RED	R(5.1K)	A4	B4	A9	B9
3	WHITE		A6			
2	GREEN		A7			
6	BLUE		A2			
5	BLACK		A3			
9	ORANGE		B11			
8	BROWN		B10			
Shell	Drain		Shell			

Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

NOTE:

1. Super High Speed USB 3.1 Cable (7/0.08T*1P+D+AL+MYLAR)*2P+7/0.06T*1P+7/0.16T*2C+F+ADB
OD:4.2±0.2mm Color: Black
- 2.USB3.1 (A) M Solder Type Shell Nickel Blue Insulation,
- 3.USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,
- 4.INSIDE MOLDING:PE
- 5.OUTSIDE MOLDING:Black PVC
- 6.CONTACTS:

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.
.x ±0.3 .xx ±0.2 .xxx ±0.1	x ±0.2° .xx ±0.1° .xxx	Linda	JUL.31.15'	
SHEET	FINISH	Design	Date	Item
Scale N/A	Unit: mm	Linda	JUL.31.15'	USB 3.0 A TYTP TO C TYPE
		CHK	Date	Dwg.No.
		APPR	Date	Part No.
		Victor	JUL.31.15'	SIZE A4 REV 1.0

Drawing is subject to change without notice. Any updated information required, please contact with our sales dept.