


CUSTOMER COPY

RoHS

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	Linda JUL.31.15'	Linda JUL.31.15'	Victor JUL.31.15'

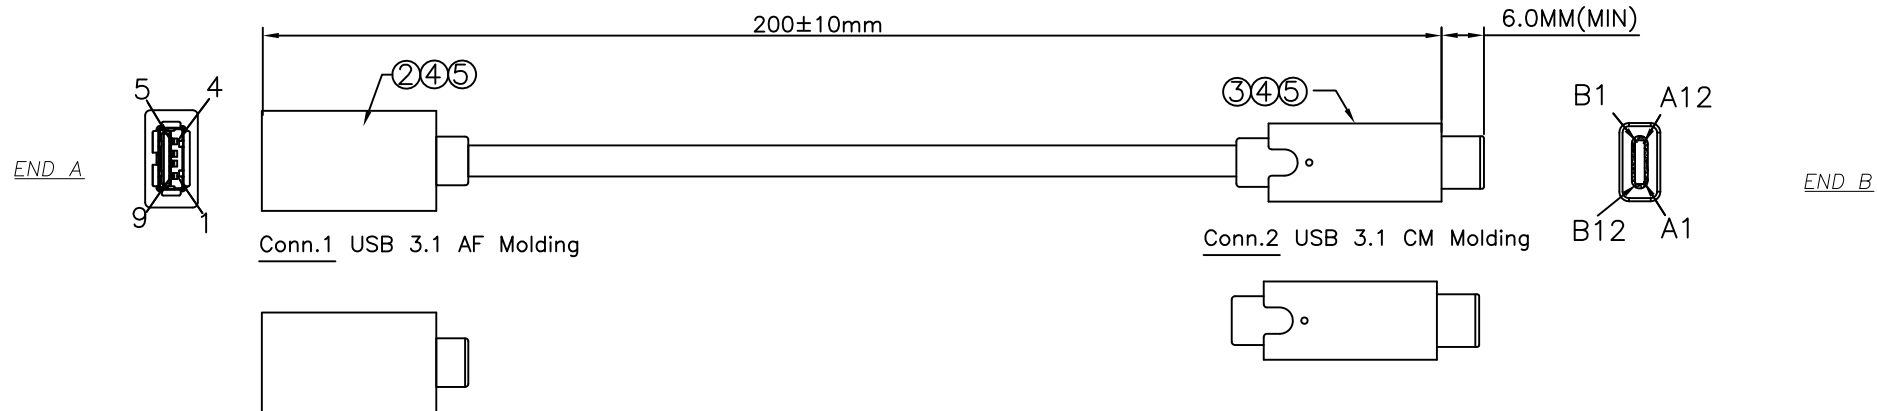

Pin Assignment

END A	END B
4	DRAIN (SDP1+SDP2)DRAIN
7	A1 B1 A12 B12
1	RED
3	WHITE
2	A4 B4 A9 B9
3	GREEN
2	A6
9	BLUE
2	A7
8	BLACK
9	A2
8	A3
6	ORANGE
6	B11
5	BROWN
5	B10
Shell	Drain
Shell	Shell

Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

NOTE:

1. Super High Speed USB 3.0 Cable (32AWG(7/0.08T)*1P+D+AL+MYLAR)*2P+32AWG(7/0.08T)*1P +26AWG(7/0.16T)*2C+F+ADB OD:4.2±0.2mm Color: Black
- 2.USB3.1 (A) F Solder Type Shell Nickel Blue Insulation,
- 3.USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,
- 4.INSIDE MOLDING:PE
- 5.OUTSIDE MOLDING:Black PVC
- 6.CONTACTS:

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS [®] COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.
.x ±0.3 .xx ±0.2 .xxx ±0.1	.x ±0.2 .xx ±0.1 .xxx	Linda	JUL.31.15'	
SHEET	FINISH	Design	Date	Item
Scale N/A	Unit: mm	Linda	JUL.31.15'	USB 3.1 AF TYPE TO USB 3.1 C TYPE
		CHK	Date	Dwg.No.
		APPR	Date	Part No.
		Victor	JUL.31.15'	SIZE A4 REV 1.0