


CUSTOMER COPY

RoHS

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	Linda 12,24,2014'	Linda 12,24,2014'	

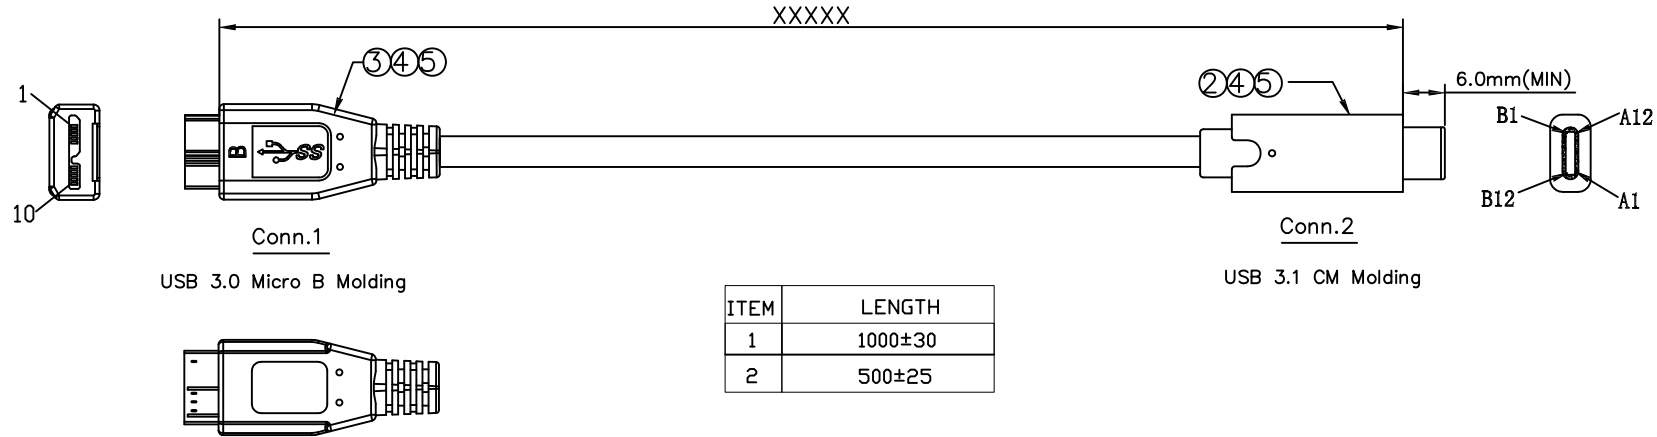

ITEM	LENGTH
1	1000±30
2	500±25

Pin Assignment

Conn.1	Conn.2
5	DRAIN(SDP1+SD92)BRAIN
8	
1	RED
3	WHITE
2	GREEN
10	BLUE
9	BLACK
7	ORANGE
6	BROWN
Shell	Drain

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot: 300V DC/10ms

5	PVC	45P PVC BLUE
4	PE	PE
3	CONN.	USB 3.1 MICRO B/M SHELL NICKEL BLACK
2	CONN.	USB 3.1 CTYPE M SHELL NICKEL BLACK
1	CABLE	UL20276(28AWG*1C+SPIRAL+AL+MYLAR)*2+28AWG*1C+30AWG*1P+2D+FILLER+AL+B BALCK OD: 4.0
NO	ITEM	DESCRIPTION

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.
.X ± 0.3	.X° ± 1.0°	Linda	12,24,2014'	
.XX ± 0.2	.XX°	Design	Date	Item
.XXX ± 0.1	.XXX°	CHK	Date	USB3.1 C TYPE TO MICRO USB3.0 B TYPE
SHEET		APP	Date	Dwg. No.
FINISH				Part No.
Scale	N/A	Unit:	mm	SIZE
				A4
				REV
				1.0

Drawing is subject to change without notice. Any updated information required, please contact with our sales dept.